



self leveling head support SUPA

Paving support by Profilitec Spa for floating floors with 28 to 120 mm height adjustable self-levelling head. The support is adjustable.
Bi-material head pp+rubber anti-noise and anti-slip.
4 pre-cut tabs to get a joint width of 2,3 mm easily removable. (on request available also with 4 mm tabs).

Noise reduction up to 25 DB (from 77 DB to 52 DB).

Exclusive coupling head on screw

Block-System for safe assembly of various components

The adjusting head is self-levelling and allows automatic slope compensation up to 5%.

Base diameter : 205 mm

Base thickness: 5 mm

Head diameter: 110 mm

Bottom base 0,033 mq

Minimum height 28 mm

Maximum Height 120 mm

Peso: 0,26 kg – 0,455 kg


Installation:

The product does not require glue for the installation.

On the corners and along the perimeter part of the base has to be removed for a correct installation (along the pre-cut lines).




N.B.: Height support adjustment with maximum 2 tiles in place per support

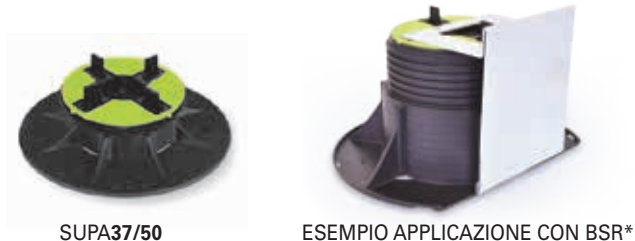

SUPA37/50

ESEMPIO APPLICAZIONE CON BSR*

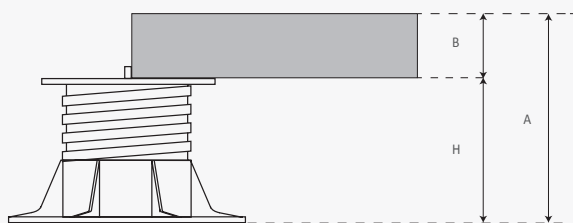


CALCULATING OF THE SUPPORT'S HEIGHT:

A= Height of the finished floor

B= Height of the flooring plate

H= Height of the support

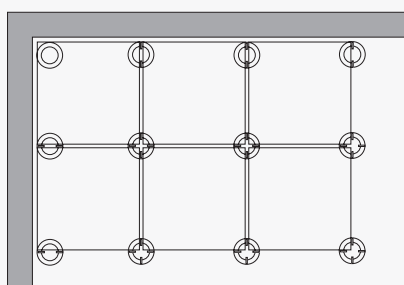

APPLICATION EXAMPLE:

Paving slab size	Quantity/m ²
60x60 cm	2,78 supports/pcs
50x50 cm	4 supports/pcs
40x40 cm	6,25 supports/pcs
30x30 cm	11,11 supports/pcs




In the middle




Along the wall




At the corner

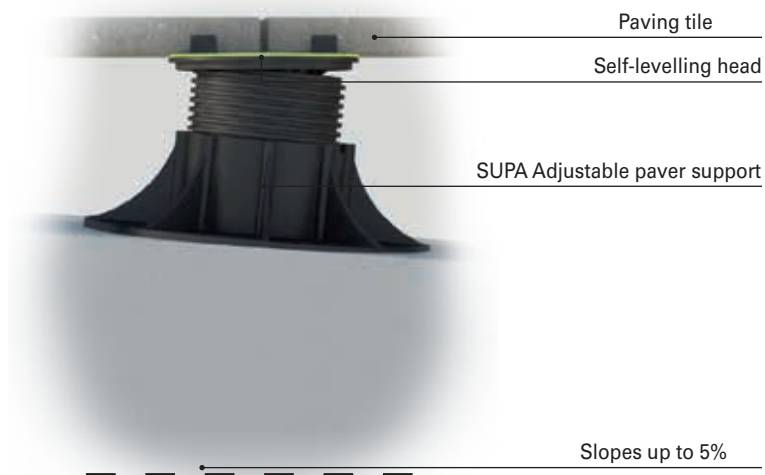


SUPA28/38




SUPA37/50



SUPA50/75



SUPA75/270



	Article	SUPA28/38	SUPF37/50	SUPA50/75	SUPA75/120
Supports material: Polypropylene	Height	28-38 mm	37,5-50 mm	50-75 mm	75-120 mm
Hardness: Shore D(70)	Resistance to central compression	19,90 KN	16,05 KN	16,45 KN	19,55 KN
Fire resistance: UNI:EN 13501-1:2009 Fire Rating E	Resistance to eccentric compression	11,60 KN	11,45 KN	14,00 KN	15,20 KN
Resistance to low temperatures: -40°C					
Production: Made in Italy					