

Structures



520 Chocolate Walnut



Matt textured

The ultra-matt surface and grain structure gives a perfect wood imitation !



453 Pilat oak



Matt wood structure

A soft, velvety matt look and feel.



529 Almond oak



In-Registered texture

A raised surface that appears to follow the wood veins of the pattern and produces an effect of authenticity. Outstandingly realistic!

- With satin-finish surface for the decors:

410 / 448 / 449 / 450 / 420 / 518

- With oiled-finish surface for the decors:

528 / 529 / 535 / 536 / 541 / 542

- And a new ultra-matt finish for the decors:

701 / 702



621 Canaries oak



In-Registered texture heliochrome

A mat / glossy effect (mat on the surface and glossy in the wood grain) for a deeper and more noticeable structure.



Technical features

RANGE OF PRODUCTS		12 mm			
		Herringbone	Forte	Solid Plus	Solid Chic
FEATURES	Warranty	35 years	35 years	35 years	35 years
	Profile and assembly	5G®	5G®	5G®	5G®
	Texture: surface aspect	←	Depends on the decor	—	—
	Bevels	4 Bevels	No	4 Bevels	4 Bevels
	Quality	←	DPL standard	—	—
	Panel	←	HDF - WP ⁽¹⁾	—	—
	Total thickness in mm	12	12	12	12
	Dimension of the board in mm	640 x 143	1286 x 214	1286 x 214	1286 x 172
TESTS	Class of use	23/33	23/33	23/33	23/33
	Abrasion resistance • EN 13329	AC6	AC6	AC6	AC6
	Impact resistance • EN 13329	IC3	IC3	IC3	IC3
	Resistance to chemical agents • EN 438	←	Group 1/2 : 5 - Group 3 : 4	—	—
	Resistance to cigarettes burns • EN 438-2-18	←	Degree 4	—	—
	Resistance to light effect • EN 438-2-16	←	Degree ≥ 6 ⁽²⁾	—	—
	Thermal resistance sqm K/W	←	≤ 0,15	—	—
	Substrate formaldehyde content • EN 120	←	Inoffensive, E1 quality - 8 mg/100 g	—	—
	Laminate flooring formaldehyde emission • NF EN717-2	←	E1 ≤ 3,5 mg/m². h	—	—
	Reaction to fire - Fire report • EN13501-1	←	Laminate flooring fitted with underlays included in the fire report: Cfl S1	—	—
	Declaration of conformity – CE labeling CE ⁽³⁾	Yes	Yes	Yes	Yes
	Traceability PEFC ⁽⁴⁾	Yes	Yes	Yes	Yes
	Health safety labelling ⁽⁵⁾	←	A+ Class	—	—
LOGISTICS	Boards per kit	13	6	6	6
	Area per kit in sqm	1,19	1,65	1,65	1,33
	Weight per kit in kg	12,20	18	18	14
	Kit packaging	box	box	box	box
	Number of kit per pallet	60	48	48	52
	Area per pallet in sqm	71,40	79,30	79,30	69
	Weight pallet in kg	732	864	864	728

This information is given for information purpose only and specifications are liable to change without warning.



Certifié PEFC

Ce produit est issu de forêts gérées durablement et de sources contrôlées.
pefc-france.org

*Locking assembly + tapped into position.

⁽¹⁾WP : Water protect

⁽²⁾ Blue wool scale part B02 ≥ 6. Grey scale, part A02 ≥ 4.

⁽³⁾ EC marking declaration of conformity available on request on our website. All our products comply with the EN 14041.

⁽⁴⁾ Our products are made from wood taken from sustainably managed forests.

⁽⁵⁾ Information as to emissions of volatile compounds in the indoor air, which might be harmful to the health when inhaled, on a scale from Class A+ (very low emissions) to C (high emissions).


12mm	8 mm				8 mm Water Resistant	
Solid Medium	Osmoze Medium	Osmoze	Clip 400	Vintage	Harmonie	Harmonie Medium
35 years	25 years	25 years	25 years	25 years	25 years	25 years
5G®	5G®	5G®	5G®	5G®	Clip A*	Clip A*
	Depends on the decor				In-Registered	In-Registered
4 Bevels	4 Bevels	4 Bevels	No	No (with 4 bevels for 512 and 552)	4 Bevels	4 Bevels
	DPL standard					
	HDF - WP ⁽¹⁾				HDF - Water Resistant	
12	8	8	8	8	8	8
1286 x 122	1286 x 122	1286 x 192	1286 x 192	1286 x 192	1290 x 192	1290 x 122
23/33	23/33	23/33	23/33	23/33	23/33	23/33
AC6	AC5	AC5	AC5	AC5	AC5	AC5
IC3	IC3	IC3	IC3	IC3	IC3	IC3
	Group 1/2 : 5 - Group 3 : 4					
	Degree 4					
	Degree ≥ 6 ⁽²⁾					
	≤ 0,15					
	Inoffensive, E1 quality - 8 mg/100 g					
	E1 ≤ 3,5 mg/m². h					
	Laminate flooring fitted with underlays included in the fire report: Cf1 S1					
Yes	Yes	Yes	Yes	Yes	Yes	Yes
Yes	Yes	Yes	Yes	Yes	Yes	Yes
	A+ Class					
6	9	9	9	9	9	9
0,94	1,41	2,22	2,22	2,22	2,23	1,42
10	10	16	16	16	16	10
box	box	box	box	box	box	box
78	78	48	48	48	48	78
73,40	110,14	106,70	106,70	106,70	107	110,76
780	780	768	768	768	768	780

Ranges 2020

	The unusuals		12 mm				8 mm					
	Herring-bone	Mix widths	Forte	Solid Plus	Solid Chic	Solid Medium	Osmoze Medium	Osmoze	Clip 400	Vintage	Harmonie	Harmonie Medium
	P10	P11	P13	P14-15	P16	P17	P19	P20-21	P22-23	P24	P26	P27
103	Authentic walnut					•						
122	Rustic pine								•			
140	Congo oak						•					
153	Celtic oak								•			
157	Guérande								•			
161	White pine								•			
183	Everest								•			
330	Landhausdiele oak								•			
401	Spanish oak						•					
408	Esperanto								•			
409	Cassandre		•						•			
410	Alpes' oak							•				
414	Vintage		•			•				•		
417	Doussie Africa								•			
420	Taza oak							•				
435	Jefferson	•	•	•	•	•						
436	Alpaca oak			•			•	•			•	•
437	Grey building			•			•	•			•	
441	Lady oak		•									
447	Malt oak			•		•						
448	Grey oak							•	•			•
449	Nevada oak							•	•			
450	Nature oak		•					•	•			•
453	Pilat oak		•									
456	Provence oak								•			
471	Sunset	•	•		•	•	•					
500	Cognac oak							•				
502	White cotton								•			
512	White fjord									•		
514	Namur			•				•	•		•	•
517	White limed grey									•		
518	Rafia			•					•	•		
520	Chocolate walnut								•			
528	Chestnut oak			•				•	•			•
529	Almond oak			•				•	•		•	•
533	Cheverny									•		
535	Praline oak	•	•		•	•	•	•	•			•
536	Linen oak			•				•	•			•
538	Batik									•		
540	Inside			•								
541	Coco oak				•			•	•			•
542	Aronia oak	•	•		•	•	•	•	•			•
544	Wood stain oak										•	
550	Trade wind										•	
552	Fado										•	
553	Black charleston										•	
554	Grey charleston										•	
557	Black pine								•			
619	Sardinia oak	•	•		•	•	•					
620	Corsica oak				•							
621	Canaries oak				•		•					
622	Balearic oak	•	•		•	•	•					
625	Corfou				•							
626	Jersey				•							
627	Polar oak	•	•		•	•	•					
628	Majorca oak				•							
701	Plato [N]									[N]	[N]	
702	Aristotle [N]									[N]	[N]	

For a better understanding


PRODUCT CROSS-SECTIONS

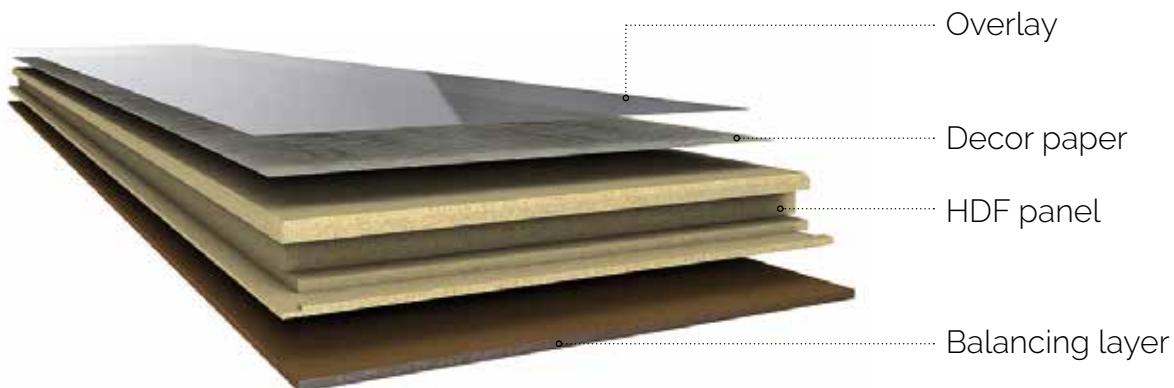

PICTOGRAMS TO MAKE LIFE EASIER!



Easy
to clean




Suitable for laying
with underfloor heating.



Dust-mites free




Panel
average density



The boards are bevelled
lengthwise and widthwise to produce an
authentic look of the flooring of yesteryear.
The joints are lacquered for easy cleaning
and optimized tightness.




Classes of use:
Heavy domestic and commercial use.




The wax layer on both sides
of the joint creates a seal and
prevents water ingress.



Compatible with damp areas due
to protection of the joints: click
fitting, paraffin wax in the grooves
and water repellent paint applied
to the V-groove edges.



The 5G® locking system enables a significantly
fast and easy installation. A reinforced plastic tongue on the
short side of the floor panel results in a strong and robust
locking, emitting a "click" sound
and locking the planks vertically.



Click assembly
combined with
tapping into
position of the
ends



*Information as to emissions of
volatile compounds in the
indoor air, which might be
harmful to the health when
inhaled, on a scale from Class
A+ (very low emissions) to C
(high emissions).



The EC symbol on all our
products certifies that they are
produced in compliance with
currently applicable standards
and that they can move freely
between countries within the
European Community.



Our products are
made from wood
taken from sustainably
managed forests and PEFC
certified.